

AV Products Australia

Spec File

L Series L6 Speaker System



Features

- Active Line Array
- Multi purpose
- Compact
- Portable

Application

- Conferences /Meeting Rooms
- Bars/Restaurant's
- Stage

Description

The L6 is a compact passive 6 element column with controlled dispersion.

Part of a combined system with the SL-15 active subwoofer powered by the Powersoft amplifier module in the SL-15.

Needs DSP to function correctly.

The L6 is made from multi-layer birch plywood, is painted strong and environmental coating & with a mesh metal grille with foam backing to protect the driver. A top hat speakers stand in the base. 2 x speakon NL4 connectors,


Manufactured by
HZ Audio

AV Products Australia
PO Box R592
Royal Exchange 1225
Phone: +61 2 9241 1884
Web: www.avpau.com
E-mail: sales@avpau.com



Specification – L6

Frequency Response	130Hz – 20khz (+/- 6dB)
Sensitivity	96dB (1W@1m)
Nominal Impudence	12Ω
Power Handling	240Watt (AES)
Continuous & Max SPL	120dB 126dB
Drivers	6 x 4.5"
Dispersion	80°x 30° (HxV)
Construction	12mm Birch Ply
Finish	Textured black paint
Input Connector	Speakon NL4x2
Dimensions	774x150x210 (HxWxD)
Net Weight	12.0kg

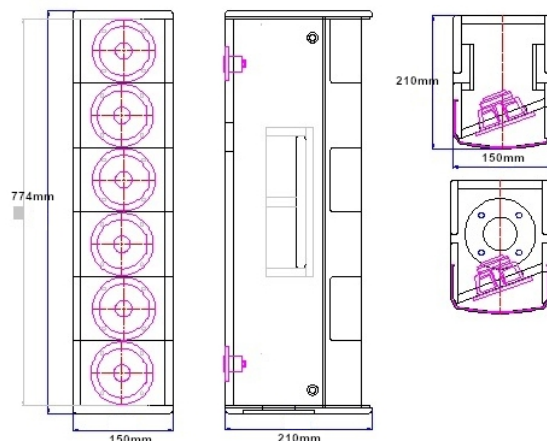

The L6 80°H x 30°V is a line source controlled dispersion speaker with 6 x 4.5" full range drivers.

The L6 is designed to be part of an L6 + SL-15 active subwoofer for music and live sound reinforcement. The L6 can be used alone or with other system but required DSP to function correctly.

The L6 is made to be powered from the SL-15 subwoofer with a DSP enabled amplifier.

SL-15 is Active subwoofer with a 4 x 450watt Powersoft DSP amplifier.

One active SL-15 can power 2 x L6 and a second passive SL-15.

