



## G6

### Applications


- Dining bar
- Meeting room
- Classroom

### Feature


- 38mm neodymium full range driver
- Excellent sound performance

### Technical specification

- **FREQUENCY RESPONSE:** 120 Hz ~ 20 kHz (± 3dB)  
100 Hz ~ 20 kHz (± 6dB)
- **NOMINAL COVERAGE:**<sup>(±4dB)</sup> 80° (H), 90° (V) Constant directivity
- **SENSITIVITY(@1w/1m):** 94 dB SPL
- **POWER RATING(AES):** 130W(AES)
- **NOMINAL IMPEDANCE:** 8 ohm
- **MAXIMUM SPL:** 115 dB / 121dB SPL peak
- **DRIVERS:** 1 x 6" Full range driver (38mm voice coil)

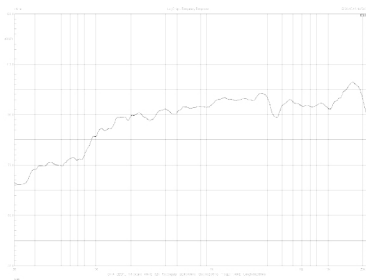

Frequency response

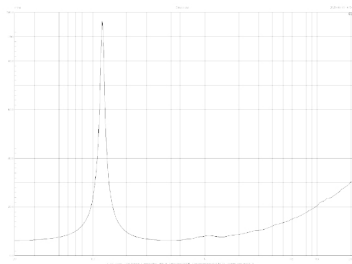

Impedance

### Physical data

- **DIMENSIONS(HxWxD):** 201 × 201 × 183mm
- **WEIGHT:** 3.5 kg
- **CONNECTORS:** Terminal
- **SPEAKER CABLES:** red +, black -
- **MATERIALS:** 9mm, 12mm multi-plywood
- **FINISH:** Black polyurea paintings
- **GRILLE:** Black epoxy mesh grille with acoustically reticulated foam
- **RIGGING:** Lifting point

